



Dinesen Layers Ash

[Price list](#)

This price list was released on 1 April 2024.
All the listed prices are stated in EUR per m².
All the listed prices are exclusive of VAT and delivery.

dinesen.com

Dinesen

Bespoke solutions in wood since 1898


Dinesen has been creating bespoke solutions in wood since 1898. Our passion for wood and respect for nature have driven a craft-based approach that we have preserved and refined for generations. We deliver beautiful floor planks that bring you a piece of nature. To us, wood is the heart of a room and a source of well-being, calm and beauty. We create experiences that will awaken your senses and enrich your life as well as the lives of future generations.

Random lengths

Price list
01/01

Planks are delivered in random lengths, always as long as possible. Varying lengths produce a dynamic effect with fluid transitions between rooms that create a coherent expression. A floor in random lengths is a sustainable choice that maximises the utilisation of the raw wood. All the listed prices are stated per m².




Random lengths	Thickness	Width	Length	Natural
	19 mm	200 mm	2 - 4 m	152 EUR
		250 mm	2 - 4 m	160 EUR
		300 mm	2 - 4 m	169 EUR

Dinesen Layers Ash is a collection of engineered wooden floors of the same high quality as Dinesen plank floors. The planks are constructed of three layers of solid wood. The topside consists of the finest solid Ash in a thickness matching our solid plank floors and will last for generations. The middle layer is transverse and consists of solid Ash or Oak or finger-jointed offcuts of Ash or Oak from our production of solid planks. Ash and Oak supplement each other in hardness and strength, and the utilisation of both wood types contributes to the durability and sustainability of the plank. The underside of the plank consists of solid Ash or Oak or finger-jointed offcuts in Ash or Oak, like the middle layer. Thus, the underside may vary in expression from one plank to another.

Dinesen Layers Ash is available in Natural.

Ash Natural

- Rich in structure and colour variations.
- Dynamic expression with vigorous lines and varying amounts of heartwood
- A mix of planks with and without knots

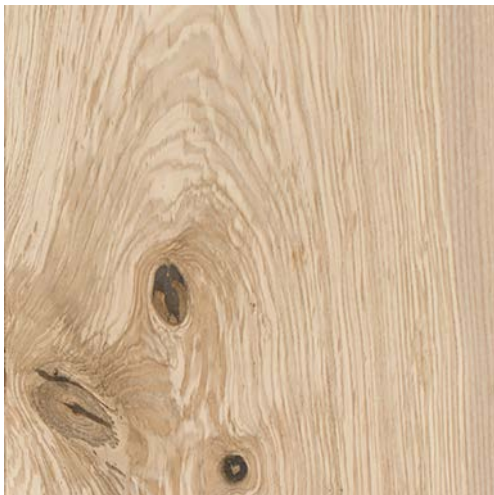

Dinesen Layers Ash

Dinesen Layers Ash is produced of European raw wood sourced mainly from forests in France and southern Germany that have been family-owned for generations and sustainably managed for centuries.

Throughout a long lifetime, the trees have demonstrated their resilience and ability to withstand the ravages of time. The result is mature trees characterised by excellent stability and durability. That is why we strive to maximise the lifespan of the selected trees. Our planks in Layers Ash is a good example of how we use leftovers from our production of Dinesen Ash and Oak to create a strong, high-value product. Thus, the finished floor will have at least as long a lifetime as the tree in the forest.

The 'eye of the needle'

To ensure top-quality planks, each tree is subjected to strict quality criteria for straightness, growth rings and knots. Only a select few meet the standards for a harmonious and enduring Dinesen product. In order to maximise the lifespan of the selected trees, we strive to utilise all of the raw wood.

Knots

A Dinesen floor is a piece of nature – a living material with its own story. Our goal is to deliver harmonious floors that bring you closer to nature. A knot is the part of a branch that is embedded in the trunk, and it tells the story of the tree's life and vitality. We wish to preserve the natural expression and bring out the beauty of the raw wood. As the knots are an important part of this story, we carefully repair knots as part of our quality control. This improves the quality of the plank and ensures a respectful use of the tree. Knots are carefully repaired with a special knot glue in a darker colour, and a hot-melt adhesive is used as a filler for any tiny gaps in the wood.

Based on the length, width and visual appearance of the plank, we assess the number and sizes of knots, medullar rays, pith repairs and so forth as the individual planks pass through our hands.

We cannot provide a precise specification but refer you to the images on the following pages. The photos show examples of Natural planks and offer a representative, but not exhaustive, impression of their visual appearance, including grain and knots.

Ash Natural

Ash Natural planks are rich in structure and subtle colour variation. They are characterised by vigorous lines and varying amounts of heartwood, which results in a dynamic, graphic expression, with and without knots.



Photos are only indicative.

About the planks

This price list and photo series offers a representative but not exhaustive impression of the number of knots, grain structure and visual appearance overall. The price list does not cover all variants and natural occurrences. Thus, 2-3% of the planks must be expected to display minor deviations.

A Dinesen floor is a natural product in the best sense of the word and the sorting will thus always reflect the natural character of the wood.

The planks are CE-labelled and produced in accordance with Dinesen's factory standards with reference to EN 14342:2013. Declaration of Performance (DOP) is available at dinesen.com.

Drying, sorting and production take place at our factory in the town of Jels, Denmark. The planks are delivered with a moisture content of 7% +/-1 and are suited for underfloor heating.

The planks are delivered unfinished and need to be sanded and finished as part of the installation. Dimensions and thicknesses are defined in the current price list, which is available at dinesen.com.

We refer you to our general guidelines for additional information.

Delivery times

Delivery times for the various dimensions and types vary and may in some cases be considerable. For more information on delivery time, please contact Dinesen on +45 7455 2140.

Installation

Always consult our instructions or contact our technical department at technical@dinesen.com or +45 7455 2140.

Underfloor heating

All Dinesen planks are suitable for underfloor heating.

Maintenance

We recommend Dinesen products for surface finish, care and maintenance. Our soaps are made specially for Dinesen floors. To preserve the beauty of your Dinesen floor, always use Dinesen floor care products. We cannot guarantee the durability or condition of the surface if you use alternative products. You can find a full range of floor care products in our web shop and view instruction videos at dinesen.com.

Certificates

Sustainable forestry is a part of Dinesen's DNA. We understand and respect the importance of nurturing the forest and supporting the professional forestry workers who tend the trees that turn into Dinesen's products. In order to promote and contribute to the preservation and development of sustainable forestry, we are FSC®- and PEFC™ certified. Dinesen products with FSC and PEFC certificates are available on request.



We do not accept any liability for printing errors.